

ALFA X



A sleek, modern and cost-effective luminaire. Alfa X is a downlight luminaire for offices and public spaces. It can be suspended or installed on a surface or luminaire track. Its downlight makes it ideal for lighting workstations. The product family offers different intensities and light distribution variations to suit a wide range of needs. The luminaire has been designed with a particular focus on non-glare, which is achieved using a high-quality optical structure. The frame of the luminaire is made of white-painted steel.

Benefits

With its efficiency and non-glare feature, Alfa X fulfils the high lighting demands of offices and public spaces. Light distribution characteristics optimised for interior spaces ensure even lighting. The energy-efficient luminaire guarantees minimal lifespan costs. The luminaire is especially easy to install and connect thanks to its spring lock structure. Alfa X can be quickly installed with wire brackets and can be connected from the ends or from the top in the centre of the luminaire. The light source modules are easy to replace. Pull-cord switch option available.

Suitability

A glare-free luminaire for offices and public spaces. Thanks to its downlight feature, Alfa X is ideal for lighting offices, working rooms, meeting rooms and other public spaces.



GREENLED

Product families and variants

MODEL	TYPE CODE	POWER	LUMINOUS FLUX	LUMINAIRE EFFICACY	LIFETIME	OPERATING TEMPERATURE
GL ALFA X 30W	GLAX01030	30 W	3600 lm	120 lm/W	L70F10 > 100 000 h; L80F10 > 100 000 h	0 - +40 °C
GL ALFA X 59W	GLAX01059	59 W	7200 lm	122 lm/W	L70F10 > 100 000 h; L80F10 > 100 000 h	0 - +40 °C

Notes:

All values in ambient temperature of +25°C, CCT 4000K, luminous flux tolerance +-5%, output power tolerance +-5%. Use environment must be non condensing.


Dimensions

MODEL	TYPE CODE	LENGTH (L)	HEIGHT (H)	WIDTH (W)	WEIGHT
GL ALFA X 30W	GLAX01030	1195 mm	54 mm	172 mm	4 kg
GL ALFA X 59W	GLAX01059	1195 mm	54 mm	172 mm	4 kg


General Description

COLOUR TEMPERATURE:	3000 K, 4000 K
COLOUR RENDERING INDEX:	$R_A \geq 80$
IP CLASS:	IP20
SUPPLY VOLTAGE:	220-240 Vac
FREQUENCY:	50-60 Hz
CONNECTION:	Chainable max 5*2.5mm ² OR max 3*2.5mm ² and DALI +/-
DIMMABILITY:	DALI, On/off
COLOUR:	White
MATERIAL OF THE LUMINAIRE BODY:	Steel
GUARANTEE:	5 years
ACCESSORIES (INSTALLATION):	Lighting suspension rail bracket, Suspension set
ACCESSORIES (OTHERS):	Pull-cord switch



Light distribution

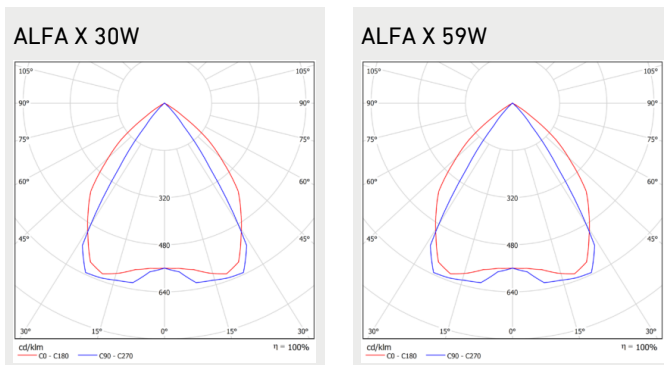

Dimensions

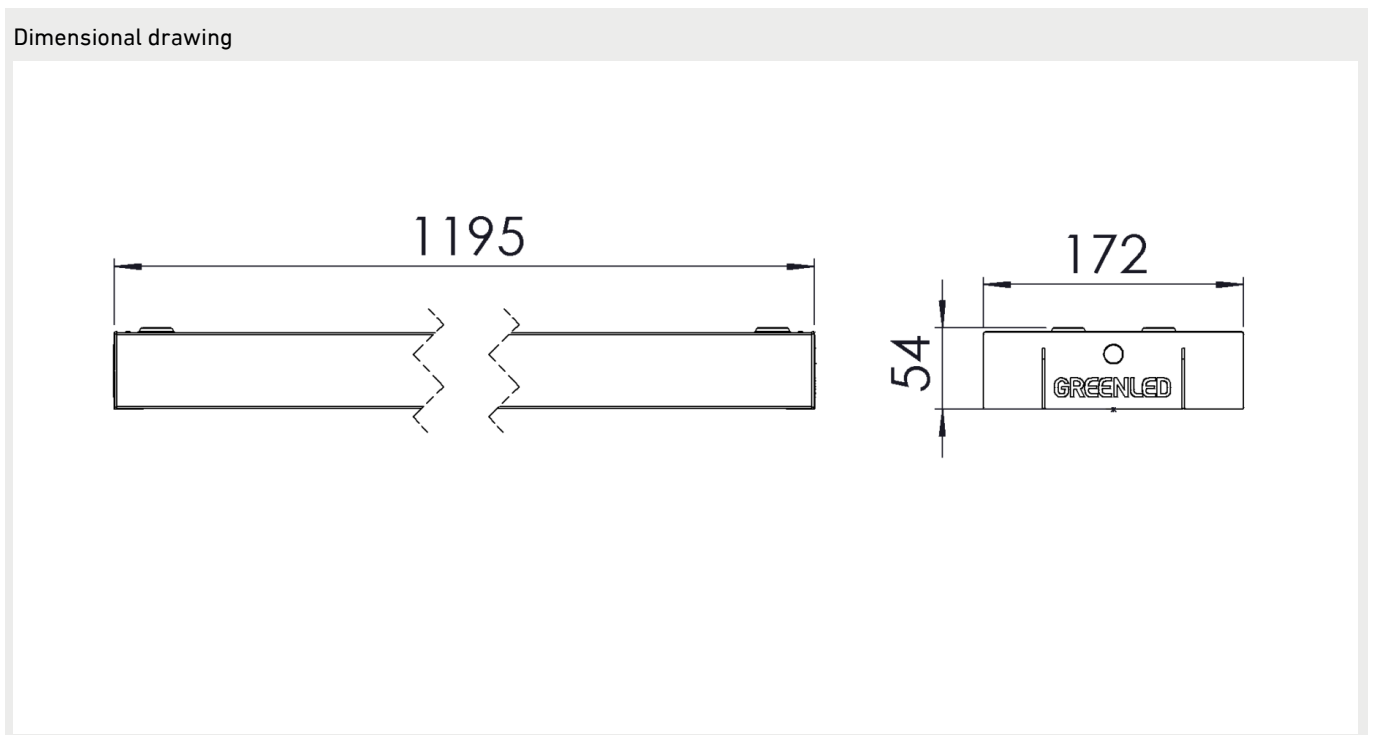

Brackets

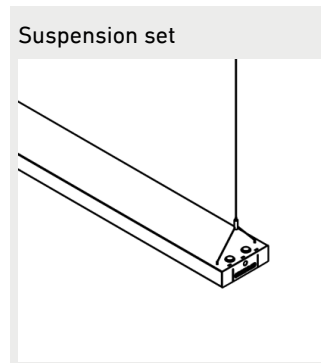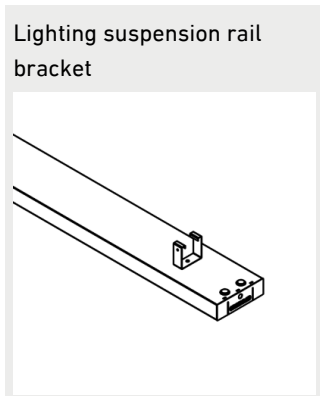

Circuit breakers

	B10	B16	B20	C10	C16	C20
ALFA X ON/OFF	15	24	30	24	40	49
ALFA X DALI	15	24	30	24	40	49

CUSTOMER SERVICE:

tel: +358 20 125 5800

info@greenled.fi