

# MEGALITE ILED



A sturdy bollard luminaire for park and yard installations. Available in two colors.

## Benefits

Symmetric light distribution and chainability allow easy and safe park and yard lighting installations.

## Suitability

iLed is designed for park and yard lighting. Can be installed on a ground plate, anchor or a suitable pipe mount.

## Product families and variants

MODEL	TYPE CODE	POWER	LUMINOUS FLUX	LUMINAIRE EFFICACY	LIFETIME	OPERATING TEMPERATURE
iLed	M613H90W1LED2830	19 W	1600 lm	84 lm/W	L80B50 80 000h	-25 - +47 °C

### Notes:

All values in ambient temperature of +25°C, CCT 3000K, CRI80, luminous flux tolerance +-5%, output power tolerance +-5%.

## Dimensions

MODEL	TYPE CODE	LENGTH (L)	HEIGHT (H)	WIDTH (W)	WEIGHT
iLed	M613H90W1LED2830		900 mm	150 mm	5,6 kg

## General Description


<b>COLOUR TEMPERATURE:</b>	3000K, SDCM ≤3
<b>COLOUR RENDERING INDEX:</b>	$R_A \geq 80$
<b>OPTIC:</b>	Park lighting
<b>LIGHT SOURCE SHIELD:</b>	PC
<b>IP CLASS:</b>	IP66
<b>IK CLASS:</b>	IK08
<b>SUPPLY VOLTAGE:</b>	220-240 Vac
<b>FREQUENCY:</b>	50-60 Hz
<b>PF:</b>	>0.90
<b>THD:</b>	20%
<b>CONNECTION:</b>	Internal chainable terminal block 3x2.5 mm <sup>2</sup> .
<b>DIMMABILITY:</b>	On/off
<b>COLOUR:</b>	Black (RAL9005) and white (RAL9016)
<b>MATERIAL OF THE LUMINAIRE BODY:</b>	Aluminium
<b>GUARANTEE:</b>	5 years

## Notes:

i


i

## Light distribution

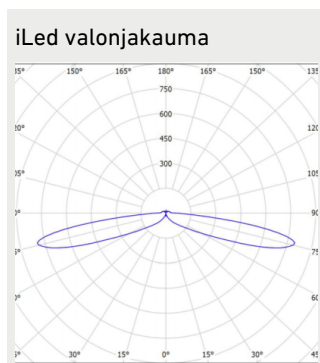

## Dimensions

iLed mittapiirros – 2100×1050

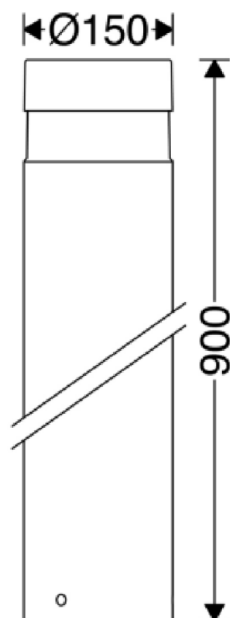

iLED jalusta – 2100×1050



## Circuit breakers

	B10	B16	B20	C10
iLed 19W	31	50	62	52

i

### CUSTOMER SERVICE:

tel: +358 20 125 5800

info@greenled.fi