

ZEETA LINEAR GEN2



Zeeta Linear Gen2 is a great luminaire for general lighting in low rooms. It can be installed on ceiling or wall surfaces. Thanks to its simplistic design it goes well in many kinds of environments. Its high-quality components guarantee a long lifecycle and maximize energy savings. The luminaire is also available as a DALI version.

Benefits

Zeeta Linear Gen2 is protected against splashing water (IP44 classification). It has a good space for connection, which makes it easy for chaining and through-wiring the luminaire. The wide light area produces even and non-glare lighting.

Suitability

For general lighting in industry and the warehouses as well as cold stores of shopping centers. Also ideal for changing rooms and corridors in schools, offices, hotels and similar premises.



Product families and variants

MODEL	TYPE CODE	POWER	LUMINOUS FLUX	LUMINAIRE EFFICACY	LIFETIME	OPERATING TEMPERATURE
Zeeta Linear Gen2 40W	GLZL20140	40 W	4646 lm	116 lm/W	L80B50 > 50 000h	-20 - +40°C
Zeeta Linear Gen2 58W	GLZL20158	58 W	6942 lm	120 lm/W	L80B50 > 50 000h	-20 - +40°C

Notes:

All values at +25°C ambient temperature, CCT 4000K, CRI 80, +-10% tolerance in luminous flux, +-10% tolerance in power. For indoor use only.

Dimensions

MODEL	TYPE CODE	LENGTH (L)	HEIGHT (H)	WIDTH (W)	WEIGHT
Zeeta Linear Gen2 40W	GLZL20140	1200 mm	80 mm	207 mm	2,6 kg
Zeeta Linear Gen2 58W	GLZL20158	1500 mm	80 mm	207 mm	3,3 kg

General Description

COLOUR TEMPERATURE:	4000K (3000K & 5000K) ^{(1) (2)}
COLOUR RENDERING INDEX:	$R_A \geq 80$
OPTIC:	Opal
LIGHT SOURCE SHIELD:	Polycarbonate
IP CLASS:	IP44/IP40 (IP20) ⁽³⁾
IK CLASS:	IK08
SUPPLY VOLTAGE:	220-240 Vac
FREQUENCY:	50-60 Hz
PF:	> 0,9
THD:	20%
CONNECTION:	Chainable terminal block 3 x 2.5 mm ² (ON/OFF) OR 5 x 2.5 mm ² (DALI)
DIMMABILITY:	DALI ⁽⁴⁾ , On/off
COLOUR:	White RAL9016
MATERIAL OF THE LUMINAIRE BODY:	Steel/polycarbonate

GUARANTEE:


5 years

Notes:

- 1) 3000K and 5000K as an option
- 2) SDCM ≤ 5
- 3) Luminaire is IP44 when installed on the ceiling and IP40 when installed on the wall. The luminaire is IP20 from above.
- 4) In DALI versions, the power of the luminaire can be changed (58W \rightarrow 43W and 40W \rightarrow 30W) with DIP-Switches of the driver (check the installation instructions).


Light distribution

Zeeta Linear Gen2



Dimensions

Dimensional drawing

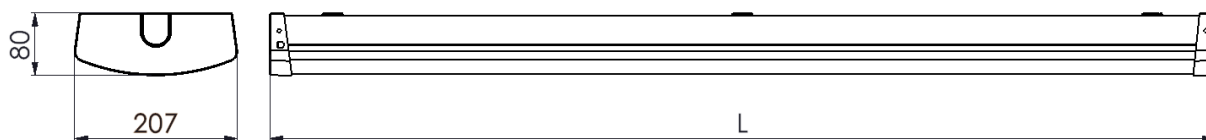

Circuit breakers

	B10	B16	B20	C10	C16	C20
Zeeta Linear Gen2 40W ON/OFF	4	6	7	6	10	12
Zeeta Linear Gen2 40W DALI	25	35	44	25	35	44
Zeeta Linear Gen2 58W ON/OFF	5	8	10	8	13	16
Zeeta Linear Gen2 58W DALI	14	23	28	14	23	28

i

CUSTOMER SERVICE:

tel; +358 20 125 5800

info@greenled.fi