

ZEETA LINEAR



Zeeta Linear is a great luminaire for general lighting in low rooms. It can be installed on ceiling or wall surfaces. Thanks to its simplistic design, it goes well in many kinds of environments. Its high-quality components are carefully selected, which guarantees a long life-cycle and maximizes energy savings. The luminaire is also available as a DALI version.

Benefits

Zeeta Linear is protected against splashing water (IP44 classification). It has a good space for connection, which makes for easy chaining and through-wiring. The UV-protected plastic diffuser extends over the entire width of the luminaire and can be removed without tools. This makes the maintenance and installation easy. The wide light area produces even, non-glare lighting.

Suitability

For general lighting in industry, and the warehouses and cold stores of shopping centers. Also ideal for changing rooms and for corridors in schools, offices, hotels and similar premises.

Product families and variants

MODEL	TYPE CODE	POWER	LUMINOUS FLUX	LUMINAIRE EFFICACY	LIFETIME	OPERATING TEMPERATURE
Zeeta Linear 39W	GLZL01039	39 W	4200 lm	108 lm/W	L85F10 > 50 000h;	-25 - +55°C
Zeeta Linear 56W	GLZL01056	56 W	6220 lm	110 lm/w	L85F10 > 50 000h;	-25 - +55°C

Notes:

All values at ambient temperature +25°C, CCT 4000K, luminous flux +-5% tolerance, input power tolerance +-5%.

Dimensions

MODEL	TYPE CODE	LENGTH (L)	HEIGHT (H)	WIDTH (W)	WEIGHT
Zeeta Linear 39W	GLZL01039	1190 mm	70 mm	208 mm	2,3 kg
Zeeta Linear 56W	GLZL01056	1490 mm	70 mm	208 mm	2,9 kg

General Description

COLOUR TEMPERATURE:	3000K, 4000K & 5000K ⁽¹⁾
COLOUR RENDERING INDEX:	$R_A \geq 80$
OPTIC:	Opal
LIGHT SOURCE SHIELD:	PC
IP CLASS:	IP44 (IP20)
IK CLASS:	IK 05
SUPPLY VOLTAGE:	220-240 Vac
FREQUENCY:	50-60 Hz
PF:	>0,95
THD:	10%
CONNECTION:	Chainable max 5*2.5mm ² OR max 3*2.5mm ² and DALI +/-
DIMMABILITY:	DALI, On/off
COLOUR:	White
MATERIAL OF THE LUMINAIRE BODY:	Steel / PC
GUARANTEE:	5 Years


Notes:

1) SDCM ≤ 4

From above IP20, From below IP44


Light distribution

Valonjakokuva39w

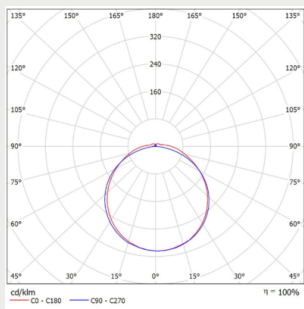

Dimensions

Linear_Mittakuva

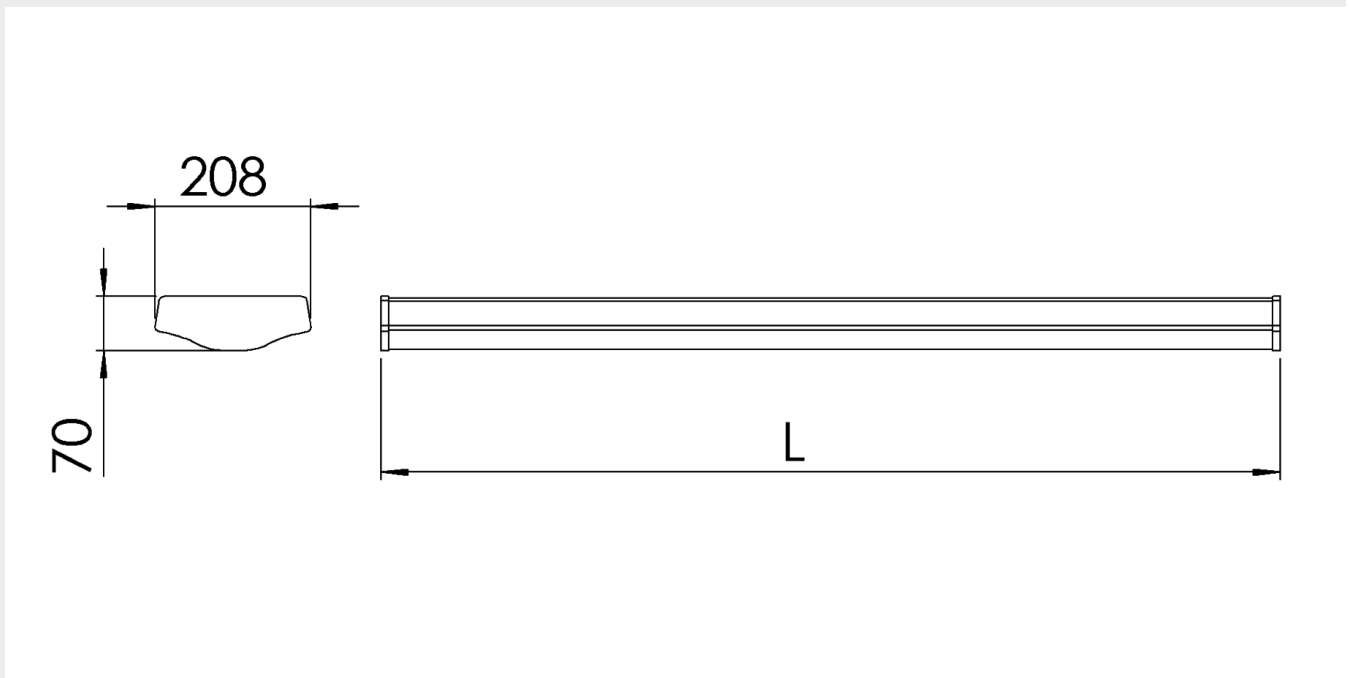

Circuit breakers

	B10	B16	B20	C10	C16	C20
Zeeta Linear 39W	14	24	28	23	37	47
Zeeta Linear 56W	8	16	16	13	21	27

i

CUSTOMER SERVICE:

tel: +358 20 125 5800

info@greenled.fi