

ZEPLINN ADVERTISING LED PANEL



Light increases commerciality. With this advertising LED panel, you help customers pay more attention to specific products. With an advertising panel, you enhance the brand of your most important partners.

Benefits

With an adjustable light output and interchangeable ads, you get the most cost-effective solution. The solution includes a wireless Casambi control for the advertising panel group.

Suitability

Zeplinn advertising LED panel is suitable for retail shops.



Product families and variants

| MODEL | TYPE CODE | POWER | LUMINOUS FLUX | LUMINAIRE EFFICACY | LIFETIME | OPERATING TEMPERATURE |
|---------------------|--------------|-------|---------------|--------------------|----------------------------------|-----------------------|
| Zeplinn 3xLED-panel | PA-A001-1007 | 89 W | 3x4000 lm | 135 lm/W | L80B50 = 57 000h, C10 = 100 000h | 0 - +40°C |
| Zeplinn 4xLED-panel | PA-A001-1007 | 118 W | 4x4000 lm | 135 lm/W | L80B50 = 57 000h, C10 = 100 000h | 0 - +40°C |
| Zeplinn 5xLED-panel | PA-A001-1007 | 148 W | 5x4000 lm | 135 lm/W | L80B50 = 57 000h, C10 = 100 000h | 0 - +40°C |

Notes:

All values in ambient temperature of +25°C, CCT 5000K, CRI80, luminous flux tolerance +-5%, output power tolerance +-5%. Use environment must be non condensing.

Dimensions

| MODEL | TYPE CODE | LENGTH (L) | HEIGHT (H) | WIDTH (W) | WEIGHT |
|---------------------|--------------|------------|------------|-----------|--------|
| Zeplinn 3xLED-panel | PA-A001-1007 | 890 mm | 16 mm | 410 mm | |
| Zeplinn 4xLED-panel | PA-A001-1007 | 890 mm | 16 mm | 410 mm | |
| Zeplinn 5xLED-panel | PA-A001-1007 | 890 mm | 16 mm | 410 mm | |

General Description

| | |
|--------------------------------|---|
| COLOUR TEMPERATURE: | 5000 K ⁽¹⁾ |
| COLOUR RENDERING INDEX: | $R_A \geq 80$ |
| LIGHT SOURCE SHIELD: | PMMA |
| IP CLASS: | IP20 |
| SUPPLY VOLTAGE: | 220-240 Vac |
| FREQUENCY: | 50-60 Hz |
| PF: | >0.95 |
| THD: | 10% |
| CONNECTION: | Connection to the push-wire terminals of the driver. Cable cross-section max 3*1.5mm ² and cable outer diameter max 9.5mm. |
| DIMMABILITY: | Casambi |
| COLOUR: | Black |


| | |
|--|-----------------------------|
| MATERIAL OF THE LUMINAIRE BODY: | Aluminum |
| GUARANTEE: | 5 years |
| ACCESSORIES (INSTALLATION): | Shelf bracket, Wall bracket |

Notes:

1) SDCM <3


Dimensions

Zeplinn LED panel

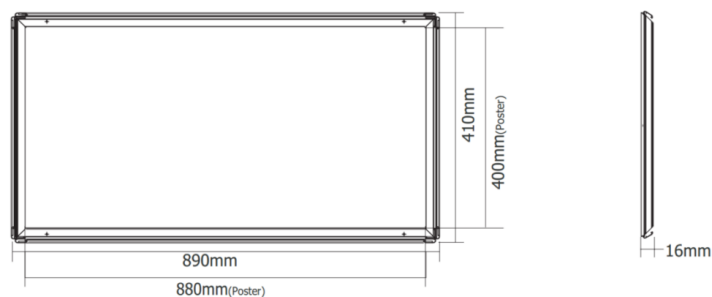


Brackets

Shelf bracket



Wall bracket



Circuit breakers

| | B10 | B16 | B20 | C10 | C16 | C20 |
|--|-----|-----|-----|-----|-----|-----|
| ZEPLINN PANELS 89W, 118W, 148W CASAMBI | 4 | 6 | 8 | 7 | 10 | 13 |

i

CUSTOMER SERVICE:

tel: +358 20 125 5800

info@greenled.fi