

ZEPLINN TILTON TRACK



Zeplinn Tilton track is an ideal choice for both accent and general lighting. The luminaire has a uniform design, compact size and the latest lens technology. It has glare-free dark light -optics and a high CRI.

Benefits

Available in 3000K and 4000K -versions with CRI 90. On/Off and DALI.

Suitability

Suitable for retail shops, showrooms, public buildings and museums.



GREENLED

Product families and variants

MODEL	TYPE CODE	POWER	LUMINOUS FLUX	LUMINAIRE EFFICACY	LIFETIME	OPERATING TEMPERATURE
Zeplinn Tilton Track 33W	TK-T097-1001	33 W	3150 lm	95 lm/W	L90B50 >55 000h, C10 50 000h	0 - +40°C

Notes:

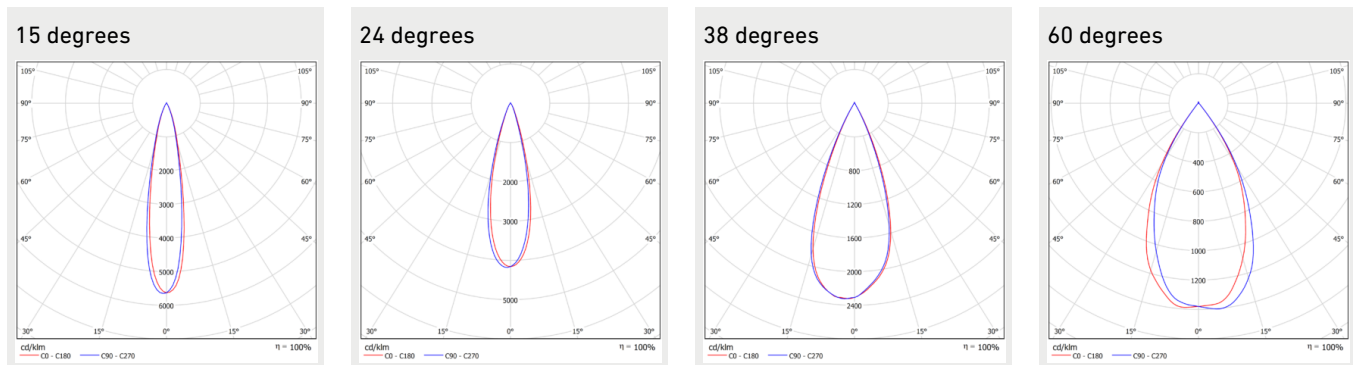
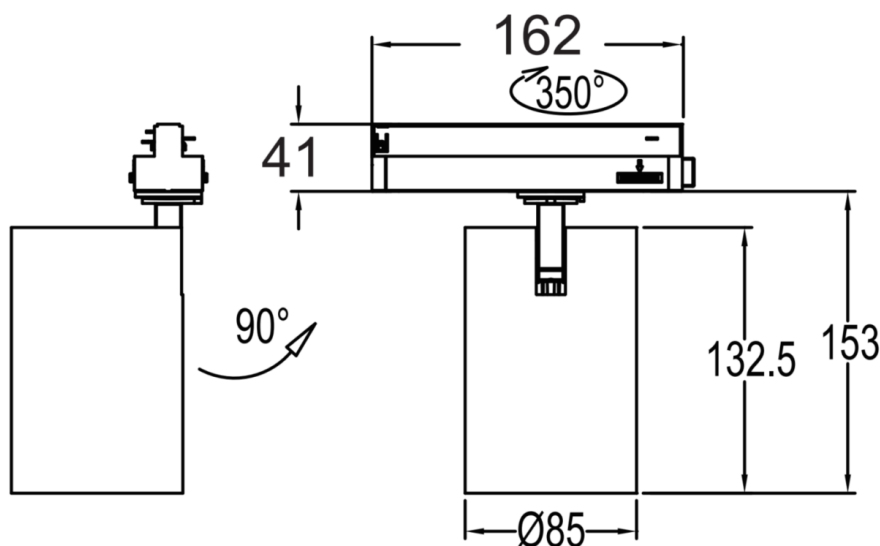
All values in ambient temperature of +25°C, CCT 4000K, CRI90, luminous flux tolerance +-5%, output power tolerance +-5%. Use environment must be non condensing.

Dimensions

MODEL	TYPE CODE	LENGTH (L)	HEIGHT (H)	WIDTH (W)	DIAMETER (D)	WEIGHT
Zeplinn Tilton Track 33W	TK-T097-1001	208 mm	153 mm		85 mm	0,8 kg

General Description

COLOUR TEMPERATURE:	3000 K, 4000 K ⁽¹⁾
COLOUR RENDERING INDEX:	R _A ≥ 90
OPTIC:	Lens optic (15°, 24°, 38°, 60°)
LIGHT SOURCE SHIELD:	PMMA
IP CLASS:	IP20
SUPPLY VOLTAGE:	220-240 Vac
FREQUENCY:	50-60 Hz
PF:	>0.95
THD:	10%
CONNECTION:	ON/OFF luminaire for three phase tracks or DALI luminaire for DALI tracks.
DIMMABILITY:	DALI, On/off
COLOUR:	White RAL9016 or black RAL9005
MATERIAL OF THE LUMINAIRE BODY:	Aluminium
GUARANTEE:	5 years

Notes:1) SDCM ≤ 3 **Light distribution****Dimensions****Zeplinn Tilton Track**

Circuit breakers

	B10	B16	B20	C10	C16	C20
ZEPLINN TILTON TRACK 33W OnOff & DALI	15	25	31	26	42	52

i

CUSTOMER SERVICE:

tel: +358 20 125 5800

info@greenled.fi