

# ZEPLINN TILTON TRACK



Zeplinn Tilton track is an ideal choice for both accent and general lighting. The luminaire has a uniform design, compact size and the latest lens technology. It has glare-free dark light -optics and a high CRI.

## Benefits

Available in 3000K and 4000K -versions with CRI 90. On/Off and DALI.

## Suitability

Suitable for retail shops, showrooms, public buildings and museums.

## Product families and variants

MODEL	TYPE CODE	POWER	LUMINOUS FLUX	LUMINAIRE EFFICACY	LIFETIME	OPERATING TEMPERATURE
Zeplinn Tilton Track 33W	TK-T097-1001	33 W	3150 lm	95 lm/W	L90B50 >55 000h, C10 50 000h	0 - +40°C

### Notes:

All values in ambient temperature of +25°C, CCT 4000K, CRI90, luminous flux tolerance +-5%, output power tolerance +-5%. Use environment must be non condensing.

## Dimensions

MODEL	TYPE CODE	LENGTH (L)	HEIGHT (H)	WIDTH (W)	DIAMETER (D)	WEIGHT
Zeplinn Tilton Track 33W	TK-T097-1001	208 mm	153 mm		85 mm	0,8 kg


## General Description

COLOUR TEMPERATURE:	3000 K, 4000 K <sup>(1)</sup>
COLOUR RENDERING INDEX:	$R_A \geq 90$
OPTIC:	Lens optic (15°, 24°, 38°, 60°)
LIGHT SOURCE SHIELD:	PMMA
IP CLASS:	IP20
SUPPLY VOLTAGE:	220-240 Vac
FREQUENCY:	50-60 Hz
PF:	>0.95
THD:	10%
CONNECTION:	ON/OFF luminaire for three phase tracks or DALI luminaire for DALI tracks.
DIMMABILITY:	DALI, On/off
COLOUR:	White RAL9016 or black RAL9005
MATERIAL OF THE LUMINAIRE BODY:	Aluminium
GUARANTEE:	5 years


## Notes:

1) SDCM  $\leq 3$

## Light distribution

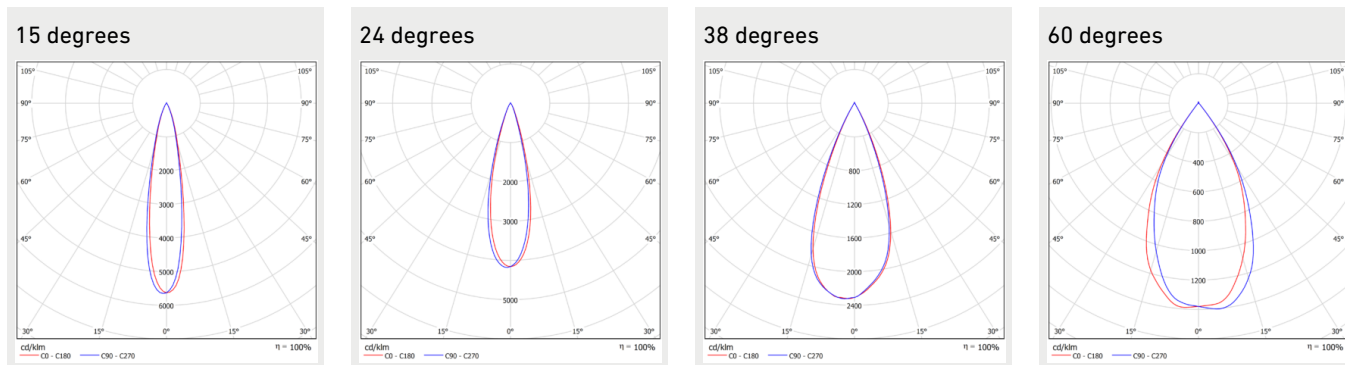

## Dimensions

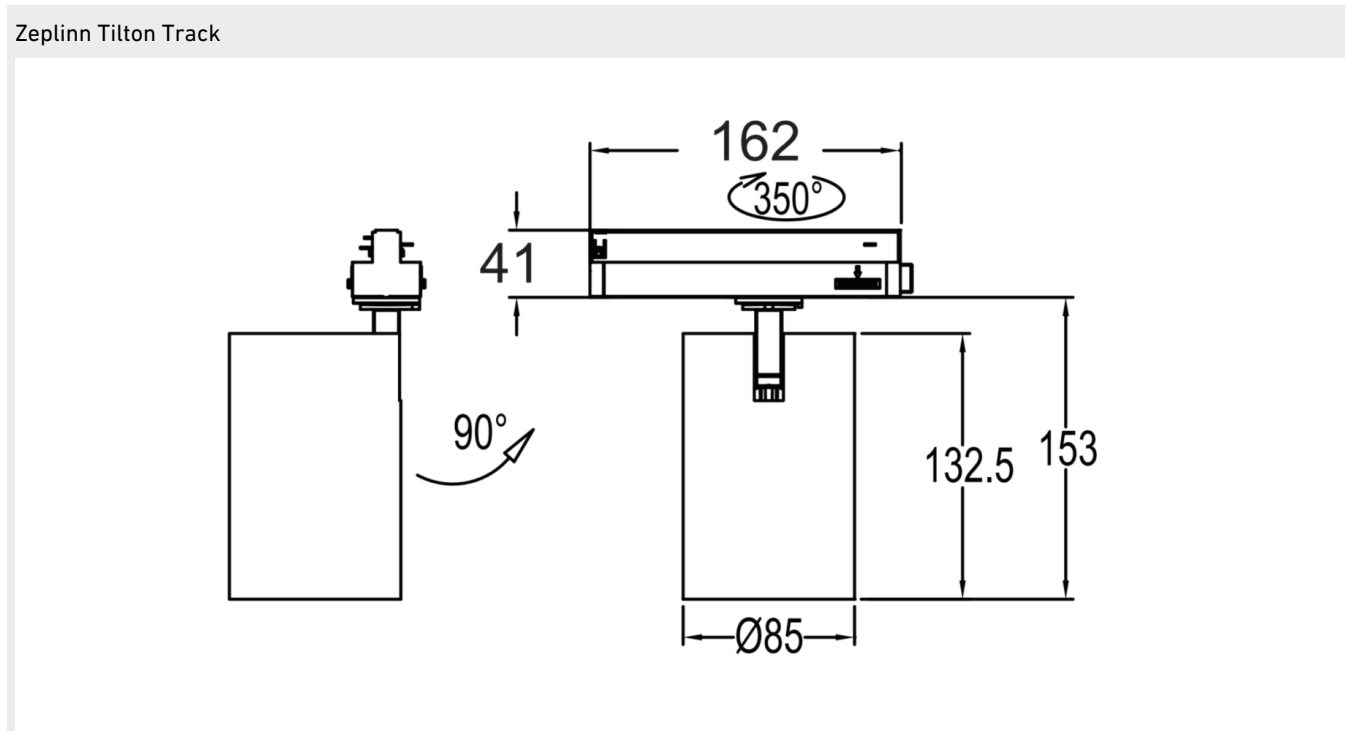

## Circuit breakers

	B10	B16	B20	C10	C16	C20
ZEPLINN TILTON TRACK 33W OnOff & DALI	15	25	31	26	42	52

i

### CUSTOMER SERVICE:

tel: +358 20 125 5800

info@greenled.fi